



(43) International Publication Date
9 June 2005 (09.06.2005)

PCT

(10) International Publication Number
WO 2005/053150 A2

- (51) **International Patent Classification⁷:** **H03F**

(21) **International Application Number:** **PCT/US2004/038269**

(22) **International Filing Date:** **16 November 2004 (16.11.2004)**

(25) **Filing Language:** **English**

(26) **Publication Language:** **English**

(30) **Priority Data:** **2003-389346 19 November 2003 (19.11.2003) JP**

(71) **Applicant (for all designated States except US):** **AGILENT TECHNOLOGIES, INC. [US/US]; 395 Page Mill Road, Palo Alto, CA 94306 (US).**

(72) **Inventor; and**

(75) **Inventor/Applicant (for US only):** **YAMASHITA, Kat-suya [JP/JP]; 4-16-2-401, Minami-Osawa, Hachioji-Shi, Tokyo 192-0364 (JP).**

(74) **Agent:** **GREELEY, Paul, D.; Ohlandt, Greeley, Ruggiero & Perle, L.L.P., One Landmark Square, 9th Floor, Stamford, CT 06901-2682 (US).**


(81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AN OPERATIONAL AMPLIFIER SELECTING ONE OF INPUTS, AND AN AMPLIFYING APPARATUS USING THE OP AMPLIFIER THE VERIFICATION METHOD

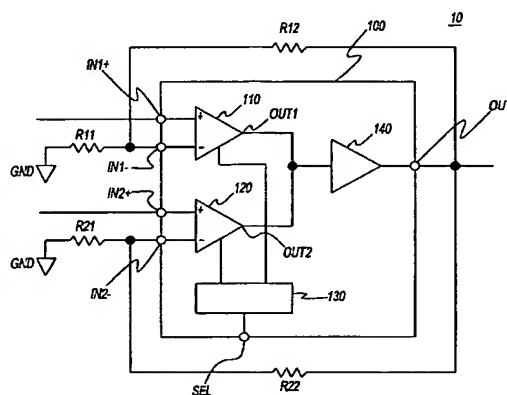

(S7) Abstract: A current feedback-type operational amplifier comprising multiple input parts and one output part, wherein each of the multiple input parts comprises a first input terminal, a second input terminal, and an output terminal, the signals input from the first input terminal are buffer amplified and output to the second input terminal, and current is output to the output terminal in an amount corresponding to the current that flows to the second input terminal; the output terminal part comprises an input terminal and an output terminal, signals obtained by adding in terms of current the signals of all of the input parts are input to the input terminal, and the signals input to the input terminal are converted to voltage signals, amplified, and output to the output terminal; and one of the above-mentioned input parts is made effective and the other input parts are made ineffective in response to first external signals, the impedance of the first input terminal, the second input terminal, and the output terminal of the above-mentioned ineffective input parts becomes high and the output current from the above-mentioned output terminal becomes zero.